

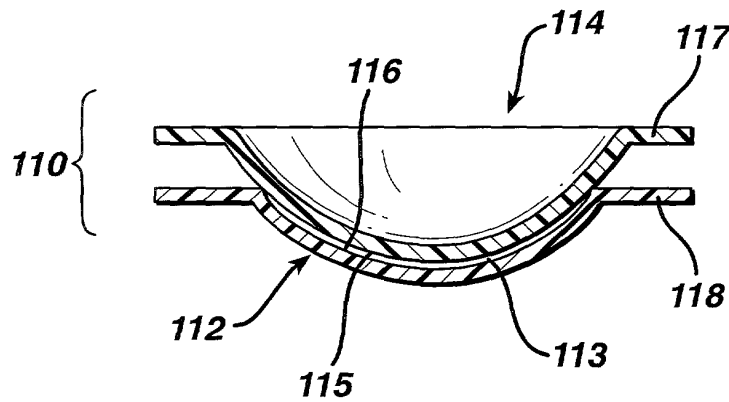
[illegible]

FIG. 2

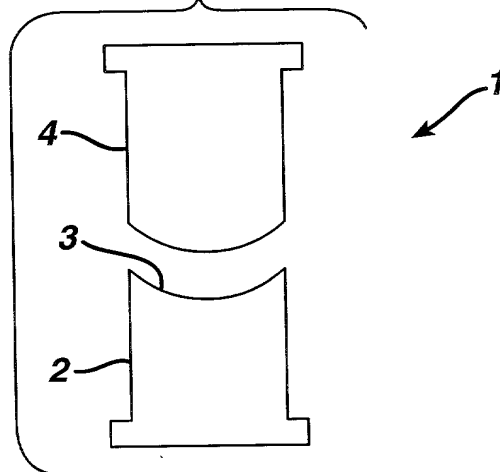


FIG. 3

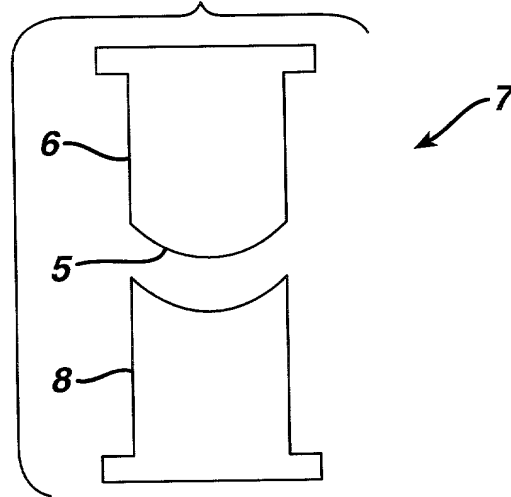


FIG. 4

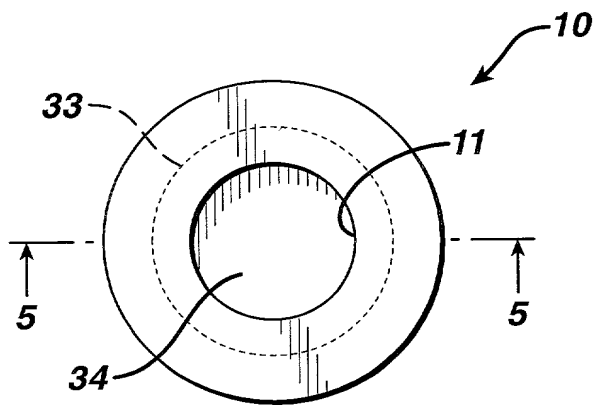


FIG. 5


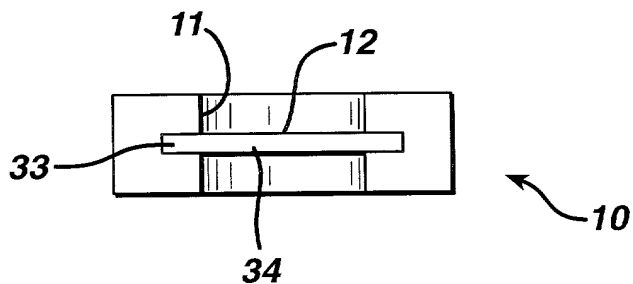


FIG. 6

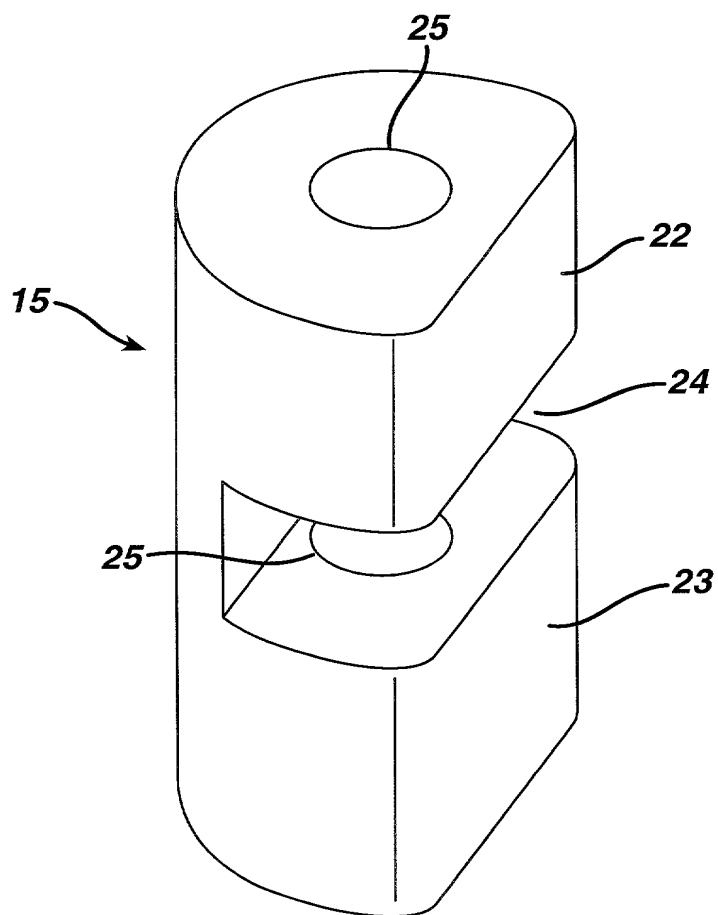

1005673.060001

FIG. 7


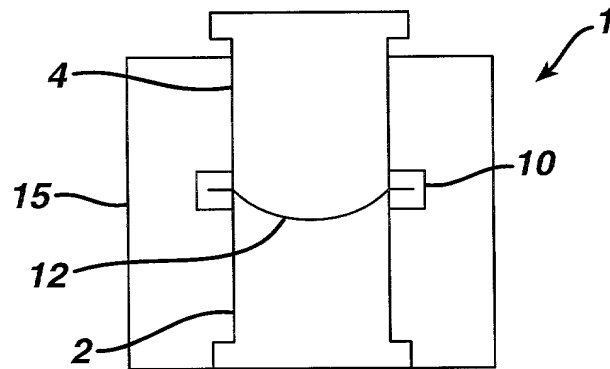


FIG. 8

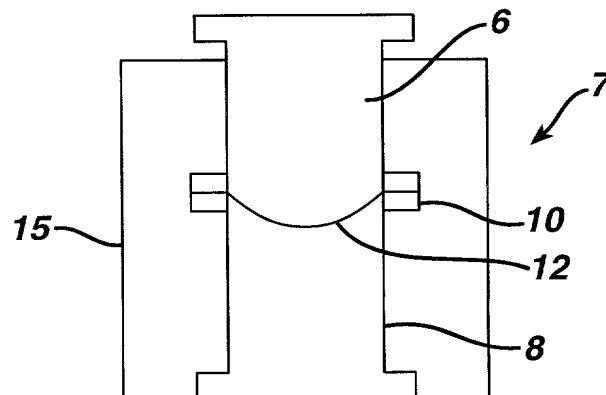

A schematic cross-sectional view of a device assembly. The assembly includes a top layer (4) supported by a frame (15). Below the frame, a horizontal bar (10) is connected to a curved structure (12). A series of vertical elements (218) are positioned below the bar, with a curved line (214) passing over them. Various other components are labeled with numbers 15, 213, 220, 210, 215, 219, 218, 217, 216, and 211.

FIG. 10


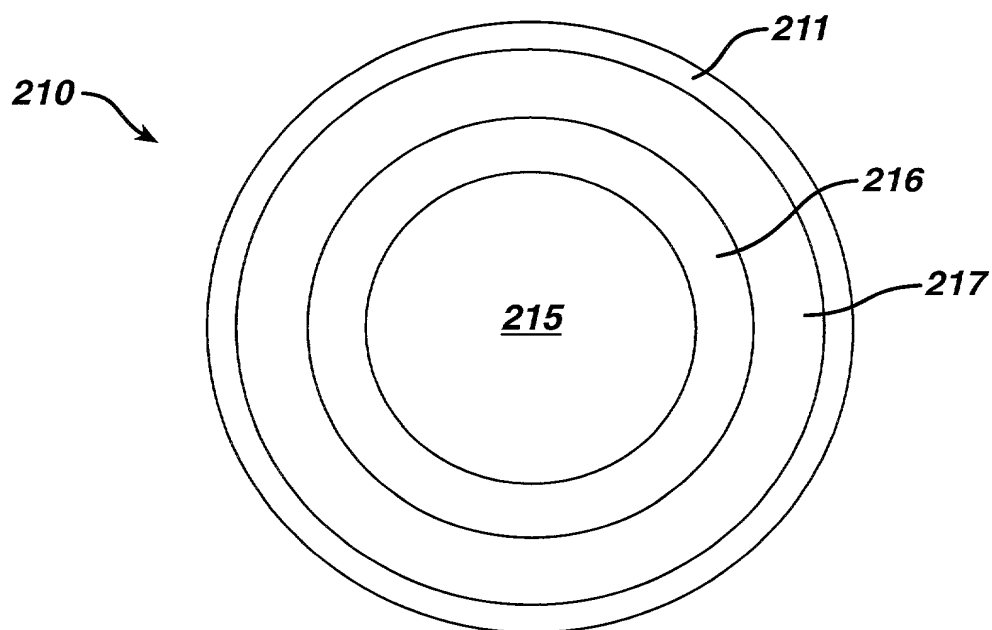


FIG. 11

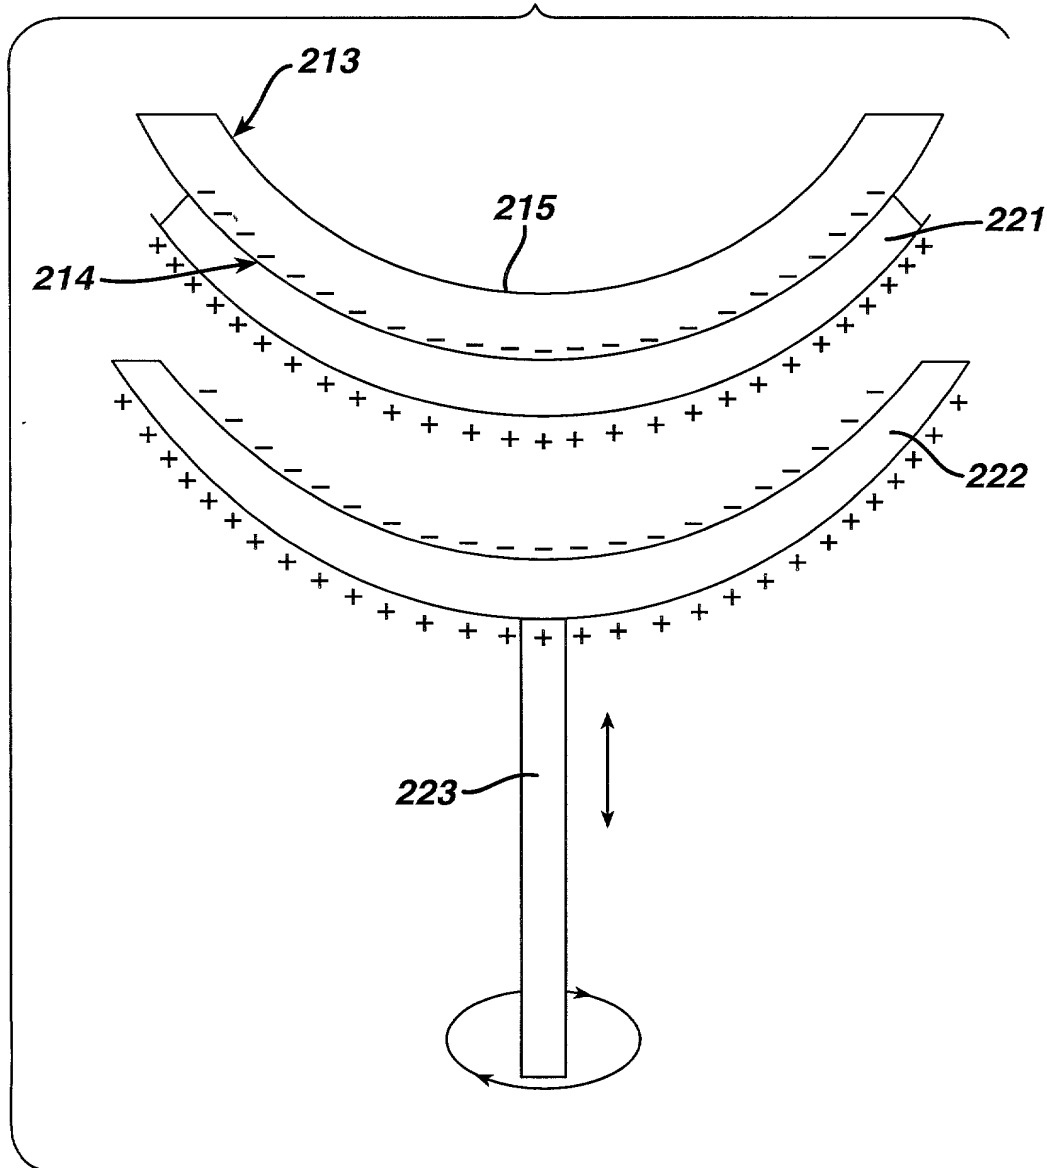

200506773 06000F

9/10

FIG. 12

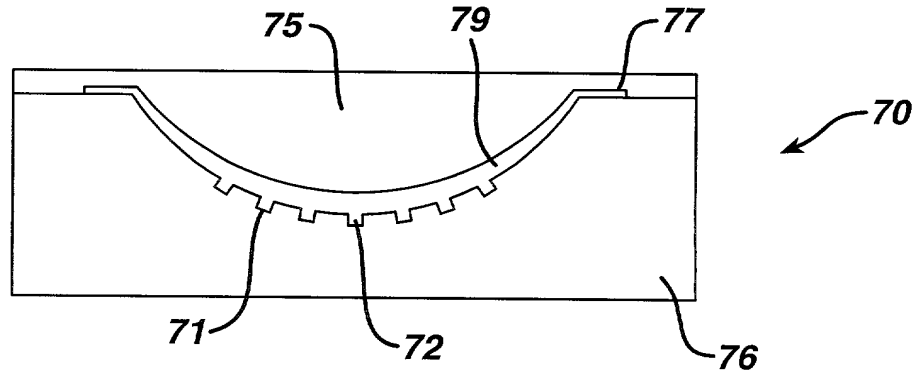


FIG. 13

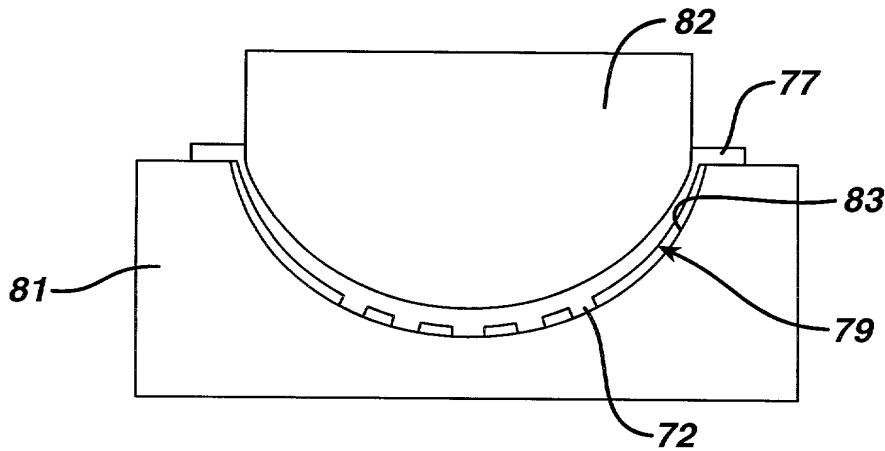


FIG. 14


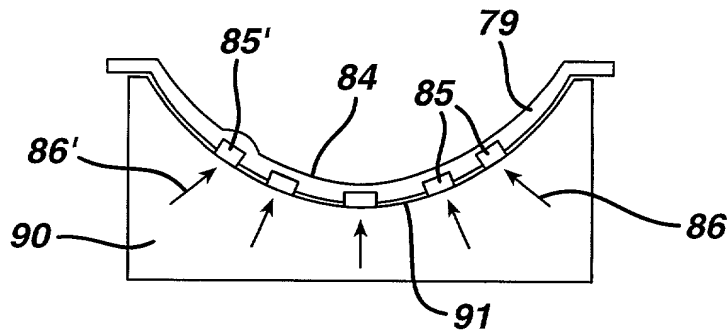


FIG. 15

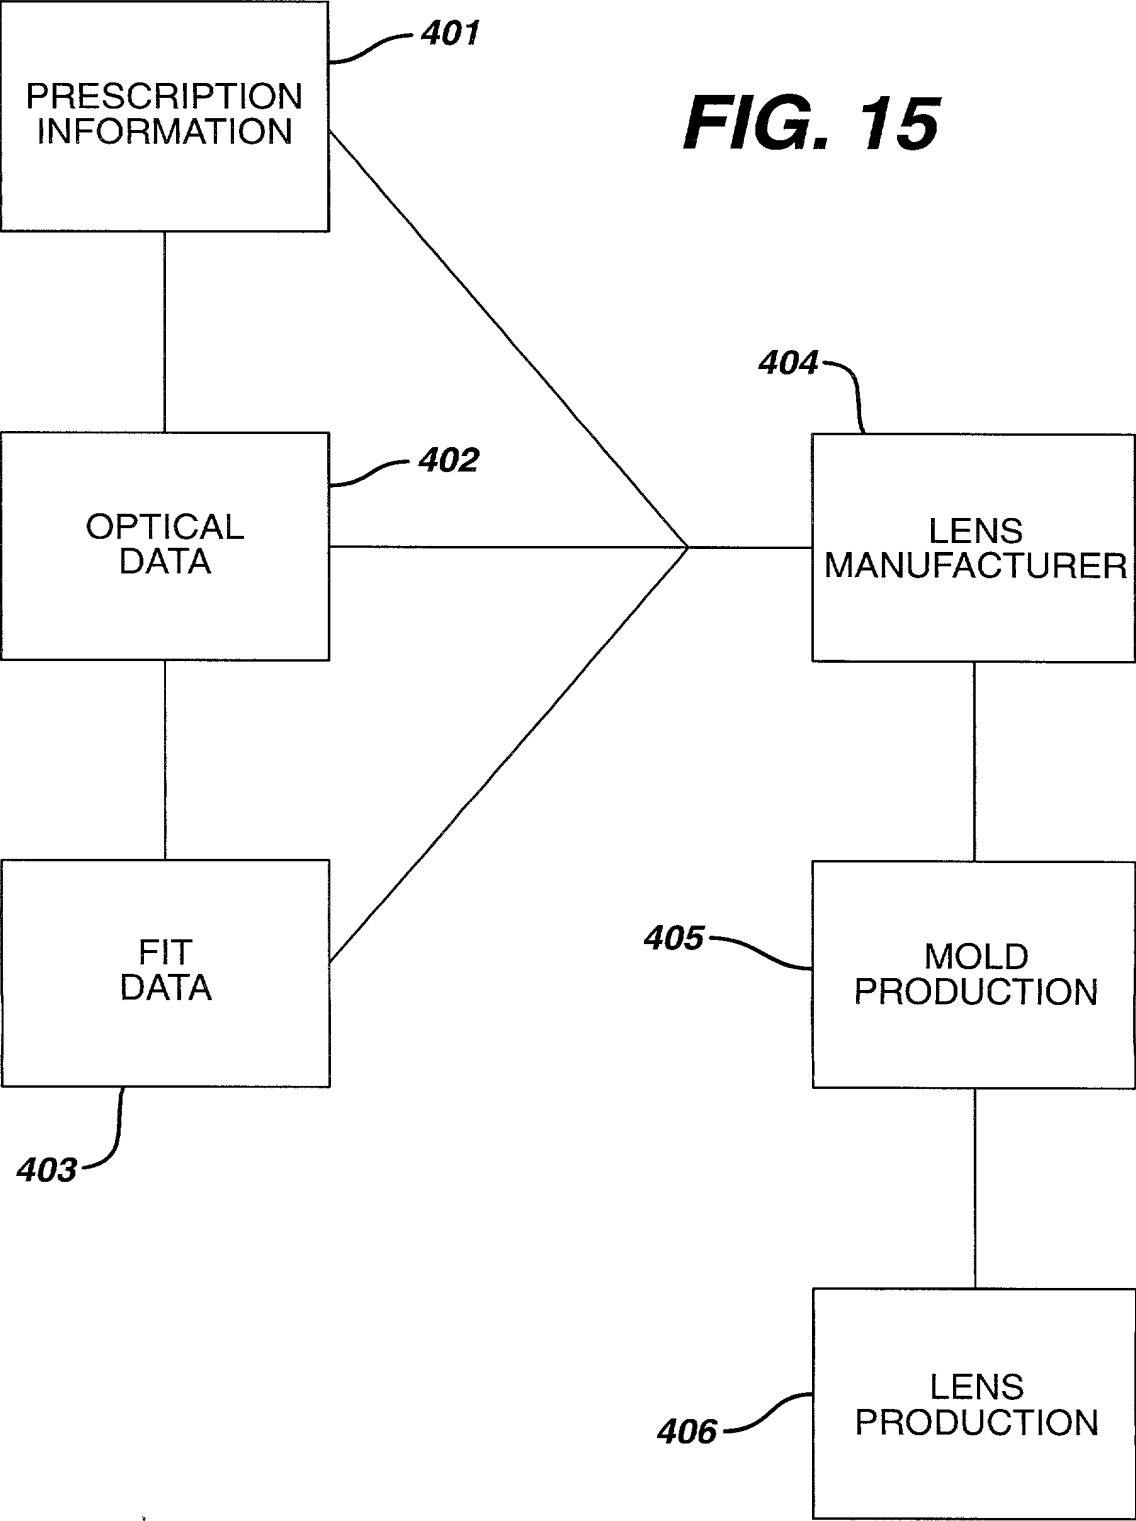

205090 "E26500"